



REEL TECH

# TECHNICAL DOCUMENT

PSI 30 – Single Wire Hoist

## Key Features :

Lifting weight of up to 30kg

Lowering distance 15m

Safety locking device

Remote controlled


Manual key switch built in

Pre wired terminals



# Please note the following warnings!

Warranty is void with non-compliance!

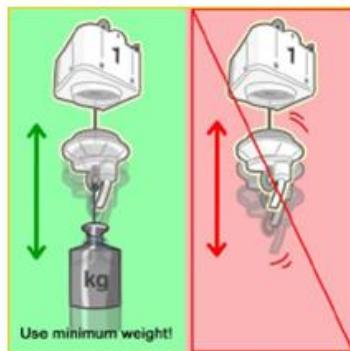

DO NOT operate the lift without the minimum weight or the lift will fail!



DO NOT carry the lift by the cables!




DO NOT apply any external voltage to the signal control wires!

## Overview:




## Wiring Diagram:

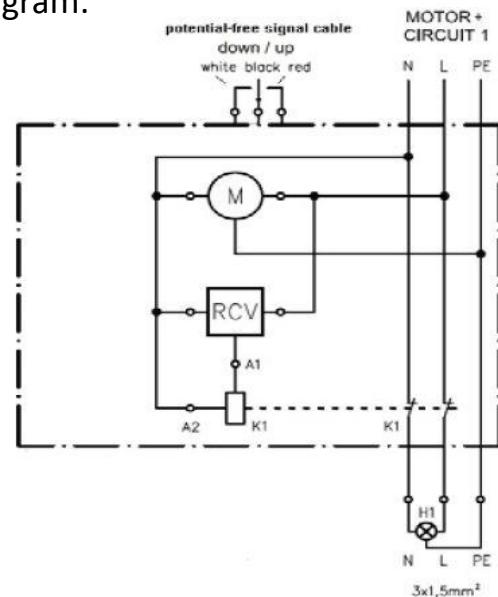

<b>Brand</b>	REELTECH		
<b>Product</b>	PSI 30		
<b>Rated Specification</b>		<b>Lowering / Raising Specification</b>	
Type	HEAVY DUTY	Model	PSI 30
Model	PSI 30	Lifting weight of fitting	12 - 30kg
Option	Standard	Lowering distance (m)	15m
Operating voltage	240v 50Hz	Lowering / Raising Speed	4.9/5.2 m/min
Wattage	120w	<b>Lamp Circuit</b>	
Dimensions	209x215x283mm	Model	PSI 30
Unit Net Weight	8.7kg	No. Of Circuits	1
Ambient Temperature	-15* to 60*	No. Of Contacts	2
<b>Construction</b>		Lamp Capacity	16 amp
Model	PSI 30		
Protection category	IP54	<b>Certification</b>	
Suspension Wire Dia	2.4mm	Standards	ISO9001, ISO14001, ETL, CE, TUV, SAA, GOST

## Safety Locking Device :

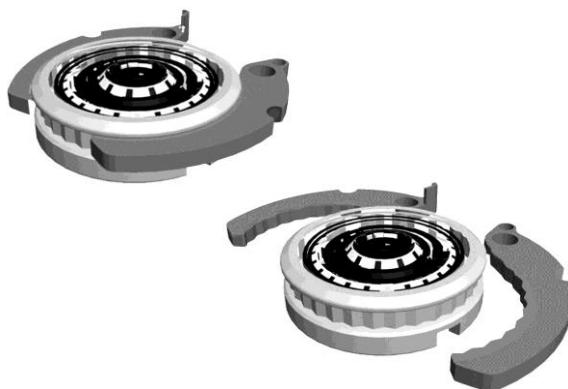

The Safety locking device provides additional security when the lift is at rest.


Special safety locking jaws engage to take the load off the suspension cables.

The jaws remain locked even in the event of a power failure and only disengage when the lift is operated.

## Electrical Contact Plates

Electrical contact is made by way of spring loaded contacts plates within the main unit and fixed contacts in the lowering coupler of the lift.


Upon lowering the lift the internal relay isolates the electrical supply, once in the raised position the relay returns power to the lower contacts

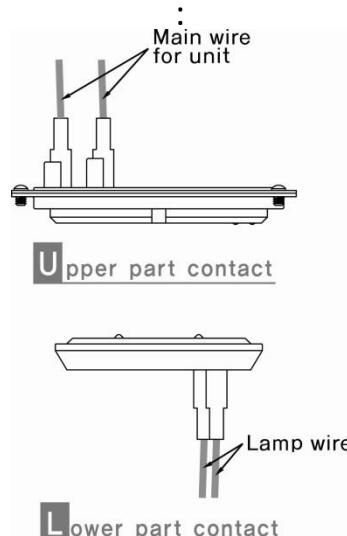


## Standard mounting option :




NB\* Secondary fixing point or tether maybe required, If in doubt please consult a structural engineer for advise

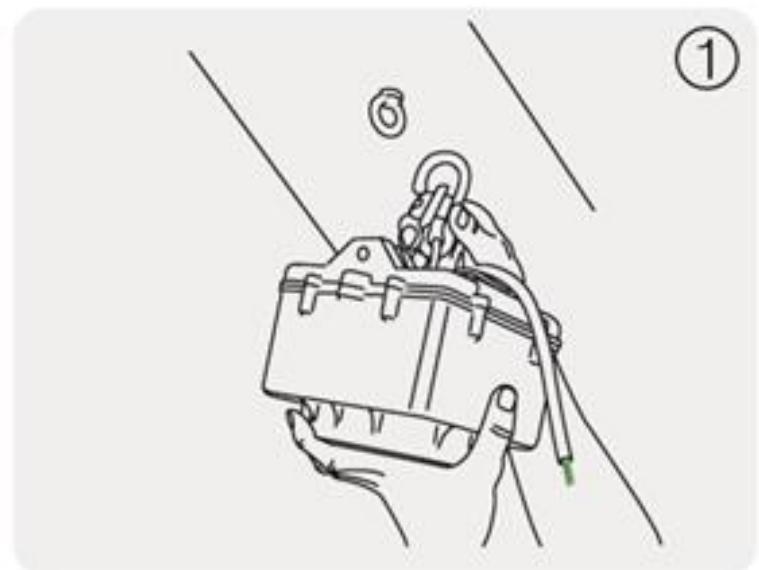

## Product Overview :

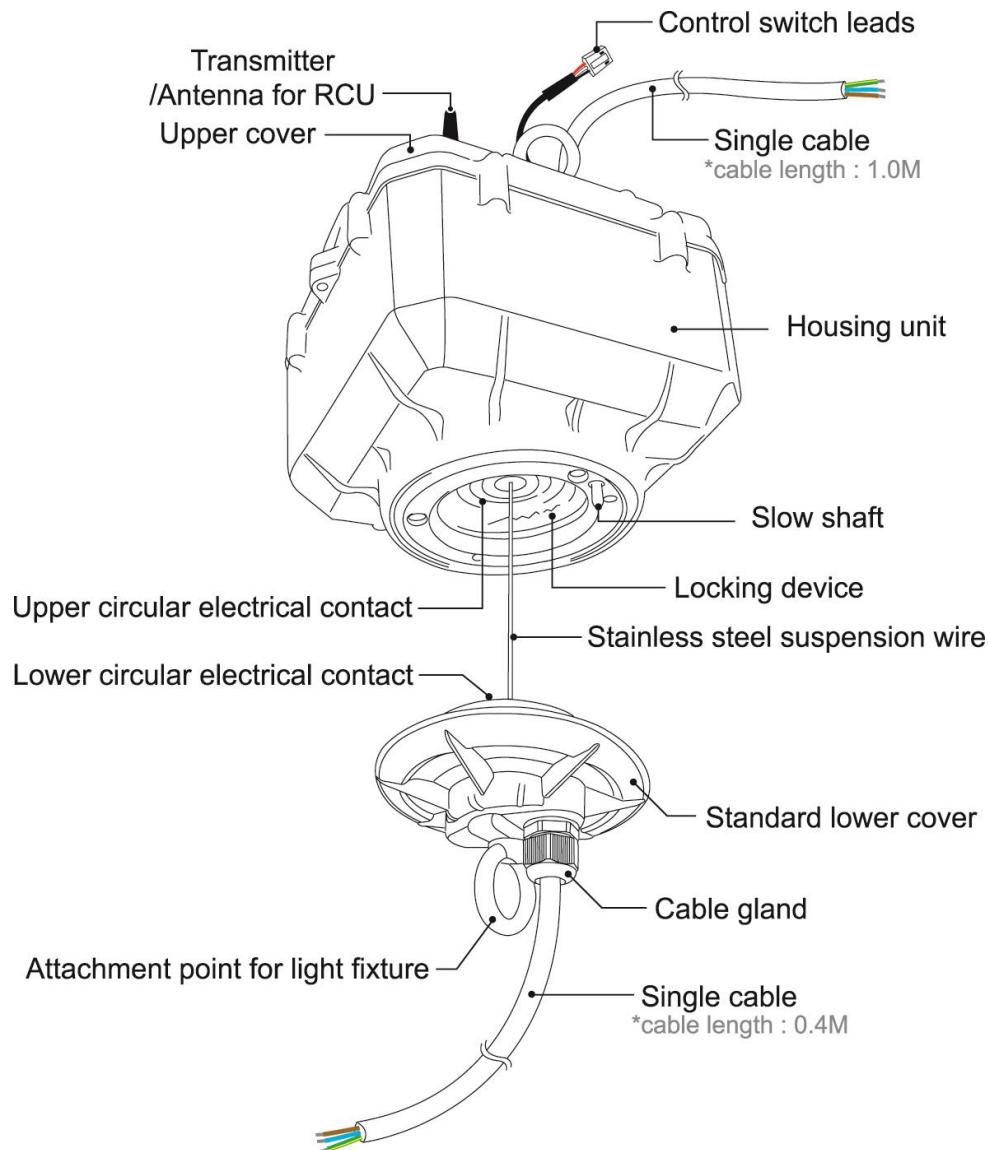

## Dimensions :

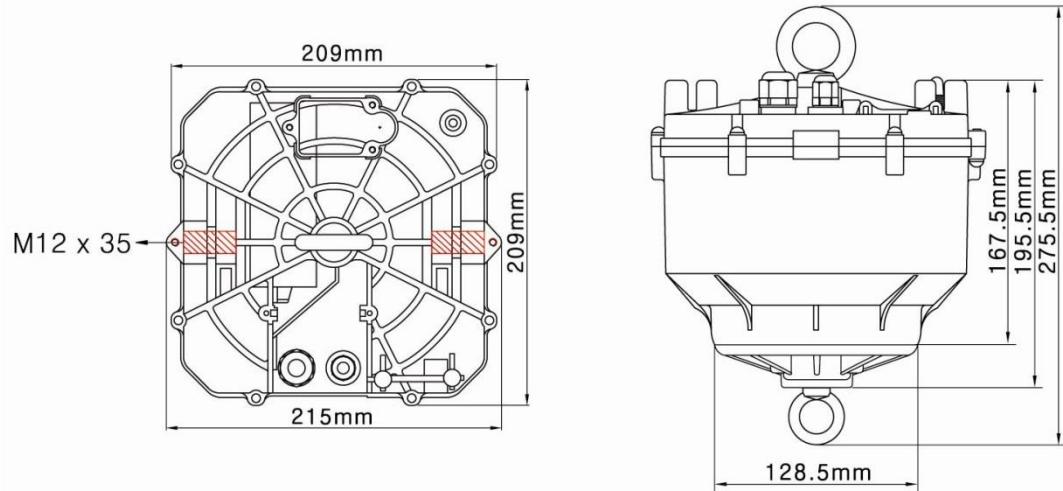





**Remote control** : or RCU can control up to 999 lift addresses  
Each lift has its own integrated radio receiver with a unique serial address.

The RCU operates in the license-free ISM band of 433.92 MHz The range is circa 100 metres.  
Lifts can be controlled individually, in pairs or in multiple groups.

- ① "ON" button for Lighting
- ② CLEAR erase the value
- ③ "OFF button for Lighting
- ④ UP To ascend lifter
- ⑤ DOWN To descend lifter
- ⑥ STOP Control button for descending length
- ⑦ SET Set mode is secured by password please contact local retailer or agency
- ⑧ GROUP Group button for group functions
- ⑨ CHANGE Select switch button for unit code and serial number code.
- ⑩ CHECK To check serial number with unit code.
- ⑪ MODE Mode button is used in conjunction with the following buttons
- ⑫ POWER button for Remote control

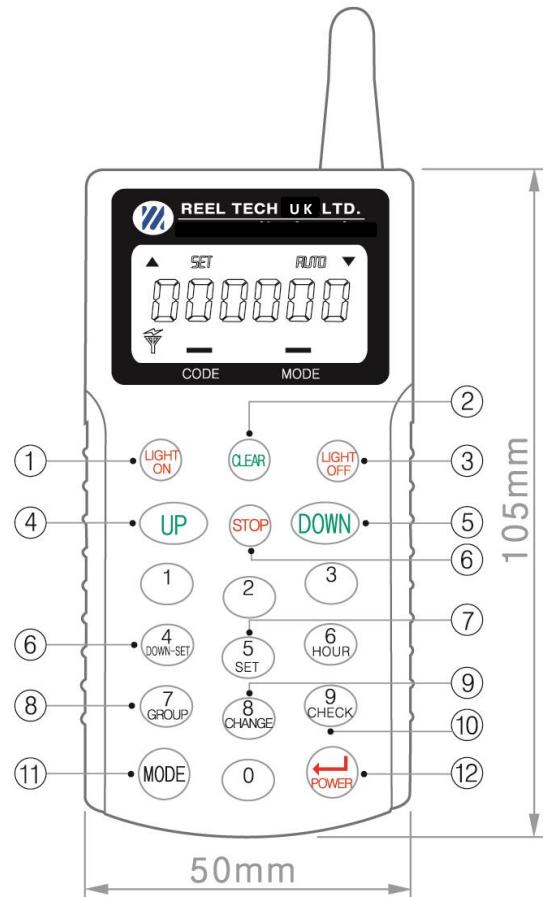


#### Auto Stop Feature :

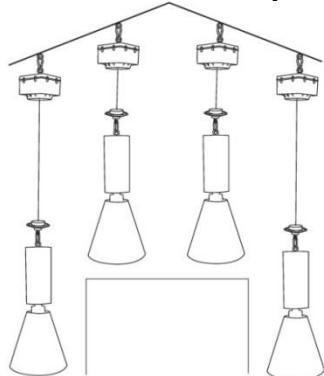


When lowering, the lift stops automatically if the decent is interrupted or when it reaches the ground.

#### Adjustable Lowering Height :

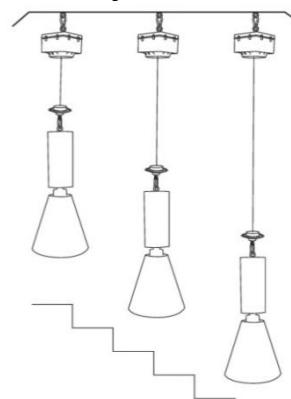

Each lift can be set to stop at the users desired lowering height. This can be stored in the lift for future operations

## Keypad operation example :

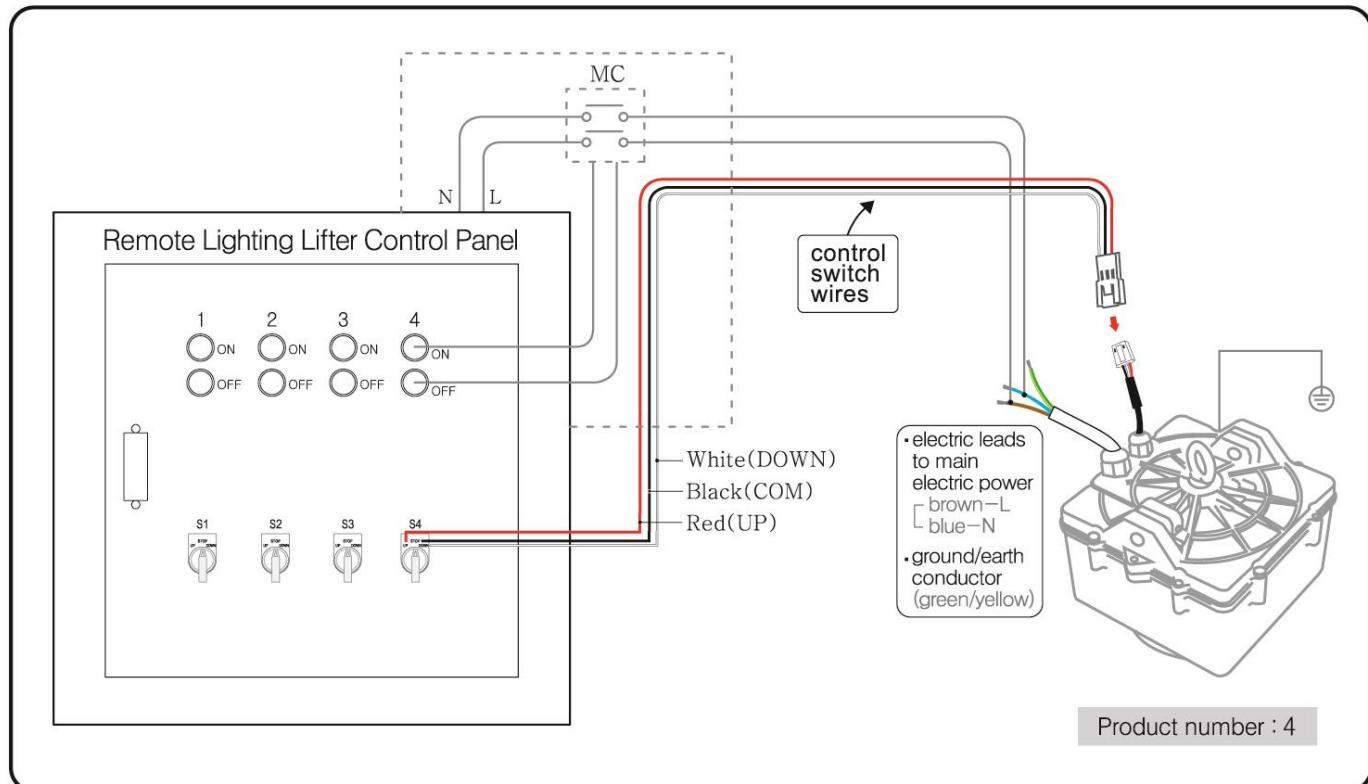

## Keypad Control :


### Control switch




**Do not connect Black+Red+White**  
Do not connect any voltage.

UP

Black+Red  
=ascend




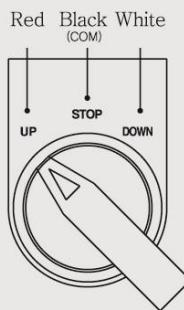


STOP

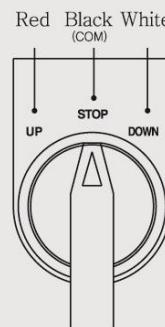


DOWN


Black+White  
=descend

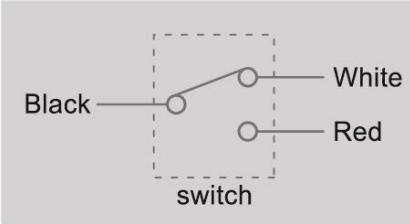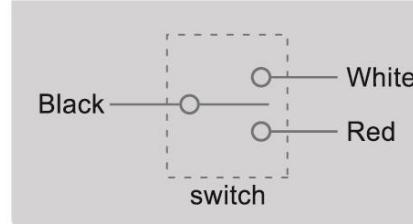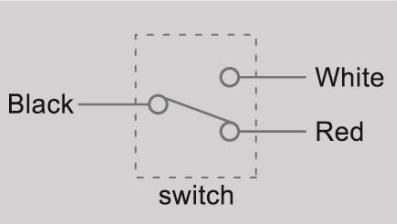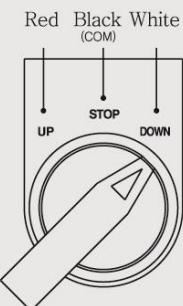



## Optional Product Accessories Examples :

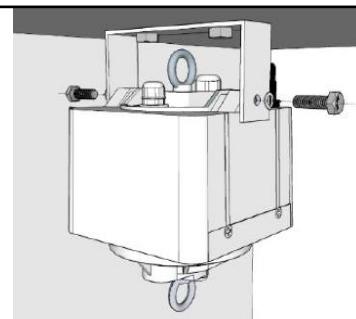


**MB C** : Used to securely mount the lift to the ceiling substrate with two points of fixing.

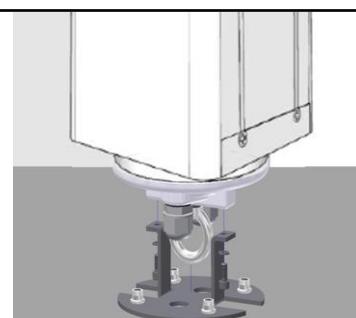


**RMP** : Ideal to mount round ceiling rose type fixture bases or pendant mounts.

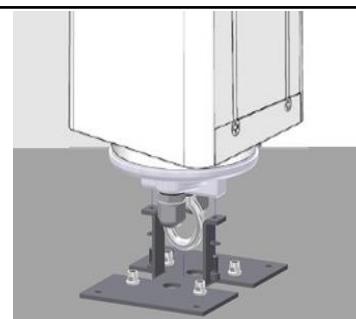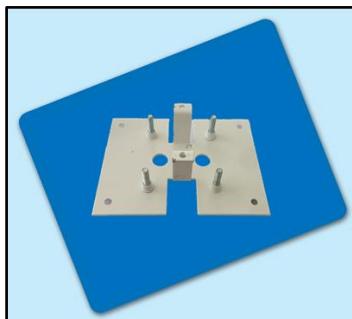

**RCMP** : Ideal to mount square or rectangular type fittings and fixtures

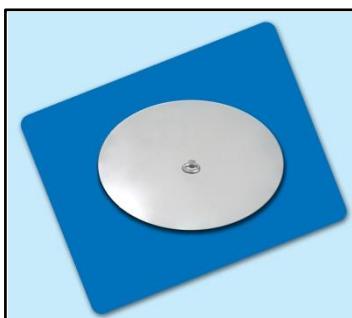

**RA M** : Used to recess the lift behind a suspended ceiling to conceal the lift from view.

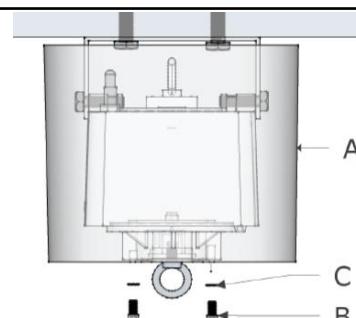

**AH C** : Used to cover surface mounted lifts, can also be painted to match ceiling colour.



**REEL TECH UK LTD**  
**Unit 1 Mere Farm Business Complex**  
**Red House Lane**  
**Hannington**  
**Northampton**  
**NN6 9SZ**  
**United Kingdom**  
**T: 01604 643522**  
**F: 01604 697028**  
**E: [enquiries@reeltechuk.com](mailto:enquiries@reeltechuk.com)**